Security

# Gas detector in compact format



### 1) GasStick - USB gas detector

- Warns of propane/butane gas (LPG) and narcotic gases
- Easy installation via USB port in the vehicle
  Can also be operated e.g. via a powerbank and thus be used mobile
- Very low power consumption: Standby: 20 mA / Alarm: 22 mA

The extra-compact GasStick is powered via a USB port (USB 2.0) in the vehicle and, thanks to extremely high-quality and small MEMS technology (Micro-Electro-Mechanical Systems), reliably warns of propane, butane gas (LPG) and narcotic gas. An integrated LED indicates the device status. Acoustic warning signal: ca. 70 dB. The minimalist design and uncomplicated installation make the GasStick a mobile gas detector for any energy source with a USB connection. Insensitive to temperature fluctuations and humidity. Dimensions: LxWxH ca. 7.7 x 28 x 10 mm. 80267 74,95

### **2** GasCubeTwin

Equipment identical to above mentioned GasCube, but with connection possibilities for two optional additional sensors. These detect the gas concentration in the air just as effectively as the main sensor and bring additional safety in the event of rising and falling gases. Cable length is 2.7 m. There are 3 possible combinations of the additional sensors:

- 1. 2x sensor for detection of CO gas (carbon monoxide)
- 2. 2x sensorfor detection of LPGgas/narcotic gas
- 3. 1x Sensor CO gas + 1x sensor LPG gas/ Anesthetic gas Color: Matt anthracite 802483 69.95

002403	09,95
3 Additional sensor CO gas (Carbon monoxide)	
802484	29,90
4 Additional sensor	
Propane/Butane Gas (LPG)	
802485	29,95





Gas detector	
Alarm systems / GPS tracking	
Door locks	403 – 408
Safes/vaults	409 – 411

Marten protection	
Safety on the road	
Fire extinguishers/warning signs	415

# THITRONIK GAS DETECTOR



 STAND	Propane& Butane • Integrated sensor and buzzer • Operation also at 230 V • Automatic sensor self test • Temperature compensation • E1 Type approval
 	V DC, current consumption ca. 70 mA, . 90 dB (internal siren), temperature

ure range  $-10^{\circ}$ C to  $+80^{\circ}$ C, weight ca. 50 g.

Scope of delivery: GBA-I, connectio	n cable for	12 V, mounting material,
manual, alarm sticker	80235	109,-
Power supply 230V f. GBA-I	80237	29,-
Universalanschlusskabel f. GBA-I	80236	26,-



· Permanent compensation of



# Thitronik G.A.S.-pro

· LED display for both sensors

- Detects KO/narcotic gases, Propane and butane
- · Carbon monoxide sensor w(optional)
- · Concealed mounting possible • External sensors for optimal
- Up to 3 sensors connectable

### Technical data:

Current consumption ca. 85 mA per sensor, 3 sensor inputs, sensitivity from 50 ppm, sound pressure ca. 85 dB (int. Beeper) ca. 110 dB (ext. Siren), temperature range -10 °C to +80 °C, dimensions (W x H x D): 101 x 39 x 91 mm, weight: 223 g

### Scope of delivery:

Central unit, sensor for anesthetic gases, propane and butane, mounting material, manual and alarm sticker

G.A.S-pro	80220	159,
Zusatzsensor	80221	65,
CO sensor	80223	99,
Auxiliary siren	80222	39,
Back up siren	80219	49,
External LED, as operation indicator wh	en G.A.Spro contro	l panel
is mounted in concealed position.	802201	15,-

# G.A.S. plug "all in one

- Detects KO/narcotic gases, propane and butane
- Integrated sensor and buzzer
- Operation in cigarette lighter
- Automatic sensor self test
- Temperature compensation
- E1 Type approval

Technical data: Current consumption ca. 70 mA, sensitivity from 50 ppm, alarm tone ca. 85 dB (int. Siren), temperature range -10 °C to +80 °C Scope of delivery: GAS-plug, manual, alarm sticker 80200

97.--

# Thitronik G.A.S.-pro III - CI bus capable



The G.A.S.-pro III is a modular gas warning system for permanent installation in your vehicle and reliably warns you of gas poisoning and narcotic gas attacks, with integrated siren and ra-

dio unit. The G.A.S.-pro III is available in two basic setups: with integrated liquid gas/stun gas sensor or with integrated CO sensor. Both variants can be combined with an additional gas or CO sensor. The internal siren sounds at a piercing 94 dB, and an integrated humidity sensor optimizes the already precise measurement in the event of high humidity in the vehicle or breathing air in the direct vicinity of the sensor. Precise temperature adjustment is mandatory. In addition, an alcohol filter function eliminates false alarms caused by alcohol in the air. Thanks to the integrated radio unit, the G.A.S.pro III communicates with the WiPro III alarm system without additional wiring.

### Technical data:

Current consumption: 9 mA (CO)/26 mA (liquid/KO gas), sensor inputs: 1 internal, 1 external, sensitivity: 50 ppm (CO) 700/1400 ppm (butane), sound pressure: 94 db (internal siren), temperature range: -20°C - +60 °C, dimensions: (W x H x D): 61 x 97 x 35 mm, weight: 74 g.

G.A.Spro III - CO(carbon monoxide)	80256	279,
Co-sensor	80223	99,
Additional sensor	80257	65,
Auxiliary siren	80222	39,

### Please note the installation of the gas detectors.

Anesthetic gases are lighterthan air, so mount sensors slightly above sleeping height. Butane/propane gas and carbon monoxide (CO) is heavier than air, so mount sensors slightly below sleeping height.







- - placement
- Sirenand alarm output
- Connection for external LED (operation indicator)
- E1 Type approval

# CARBEST GAS DETECTOR / SMOKE DETECTOR

# Safety for motorhome & caravan

**İ** 

# 1) GasStick - USB gas detector

ARBEST

INNOVATIONS FOR MOBILE LIFE

- · Warns of propane/butane gas (LPG) and narcotic gases
- · Easy installation via USB port in the vehicle
- · Can also be operated e.g. via a powerbank and thus
- be used mobile

• Very low power consumption: Standby: 20 mA / Alarm: 22 mA The extra-compact GasStick is powered via a USB port (USB 2.0) in the vehicle and, thanks to extremely high-quality and small MEMS technology (Micro-Electro-Mechanical Systems), reliably warns of propane, butane gas (LPG) and narcotic gas. An integrated LED indicates the device status. Acoustic warning signal: ca. 70 dB. The minimalist design and uncomplicated installation make the GasStick a mobile gas detector for any energy source with a USB connection. Insensitive to temperature fluctuations and humidity. Dimensions: LxWxH ca. 77 x 28 x 10 mm

74,95

80267

### ② GasCube - Gas detector in noble design

- · Warns of propane/butane gas (LPG) and narcotic gases
- Visual and audible indication of operational readiness, calibration phase and alarm

Fixed connection to 12 V on-board power supply. Pressure switch. Ready for operation after ca. 3 minutes. With high sensitivity sensor and 80 dB loud siren. Temperature-controlled sensor that works reliably even above 25°C. Power consumption in standby: 100 mA, power consumption in alarm: 180 mA. Mounting: about 100 cm above the ground. Dimensions: 55.6 x 86.7 x 24 mm. Color: Matte white 802482 64,95

(3) Counter display with 10x GasCube		
Color: Matte white	802480	633,

# 4 GasCubeTwin

Equipment identical to above mentioned GasCube, but with connection possibilities for two optional additional sensors. These detect the gas concentration in the air just as effectively as the main sensor and bring additional safety in the event of rising and falling gases. Cable length is 2.7 m. There are 3 possible combinations of the additional sensors:

- 1. 2x sensor for detection of CO gas (carbon monoxide)
- 2. 2x sensorfor detection of LPGgas/narcotic gas

3. 1x Sensor CO gas + 1x sensor LPG gas/	Anesthetic	gas	
Color: Matt anthracite	8024	83	69,95
(5) Additional sensor CO gas (Carbon m	onoxide)	802484	29,90

6 Additional sensor Propane/Butane Gas (LPG) 802485 29,95

# ⑦ LPG gas detector at TOP price

Reliably warns of gas leaks, acoustic alarm 85 dB, mounting height for butane/propane gas detection ca. 20 to 40 cm above the floor. 12 volts, current consumption 100 mA. Temperature range -10/+50°C. Dimensions 115 x 70 x 60 mm. Scope of delivery: LPG gas detector, mounting material 29.95 80216

### ⑧ 2 in 1 combi gas detector

- Detects various fuel gases, natural gas, LPG and Carbon monoxide
- 2 integrated sensors
- · Self-test function, audible and visual alarm
- · Suitable for wall mounting

Operating voltage: DC 12 Volt, temperature range: 0°C ~ +50°C Alarm sound signal: 85 dB/3 m, LPG gas alarm: sound continuous Dimensions: 118.5 x 82 x 43 mm 80218 36.95

### Smoke detector with battery operation

- Monitoring range 20 m<sup>2</sup>
- 9 V block battery included
- · With test button for function test

Alarm as sound and light signal, volume >85 dB/3 m, sensitivity 2.06 %/ ft. Monitoring area 20 sqm. Dimensions Ø 128 x 38 mm. Standard DIN EN14604, UL217. Battery life ca. 1 year. 80299 14,95



# GASWARNER











### **Response thresholds:**

Methane (town gas/natural gas) 0.4000 vol Butane (liquefied gas) 0.2050 % by volume Propane (liquefied gas) 0.2400 Vol. %

Technical data:

Operating voltage: 12 V DC (-10% / +20%) Current consumption: max. 250 mA Alarm volume: 85 dB (A) / 1 m Dimensions: 60 x 90 x 31 mm (W x H x D)

### Gas Detector "BMTG 12 V LPG and narcotic gas warner

Reliably and guickly detects LPG and narcotic gas and triggers an audible alarm (85 dB) even at low gas concentrations. Also fits into the mounting frame "Berker Integro". The average life of the sensor is 10 years. Voltage 12 V DC, consumption: 75mA. Audible alarm signal ca. 85 dB. Supplied with mounting frame. Dimensions 119 x 60 mm.

Gray	802030	104,
Brown	802040	104,

### Gas Detector "BMTCO 12 V carbon monoxide detector, warns of exhaust fumes in the vehicle

Reliably and guickly detects carbon monoxide and triggers an audible alarm (85 dB) even at low gas concentrations.

Also fits into the mounting frame "Berker Integro". Voltage 12 V DC; Consumption: 15mA. Acoustic signal at alarm ca. 85 dB. Supplied with mounting frame. Dimensions 119 x 60 mm. Grav

y	802050	144,
wn	802060	144,

# GAS ALARM P100

- Type tested for motorhomes, caravans and dwellings
- With sensor for liquid gas (butane/propane) and town gas/natural gas (methane)
- Immediately warns of gas leakage, long before a dangerous concentration of gas in the air is formed
- Loud alarm sound and red alarm light
- Green operation indicator and self-test function
- Easy mounting (wall mounting)
- Operation at 230 volts with additional power supply unit (accessory)

P100, with switching output 12 V DC, which can be used to activate additional devices such as fans, alarm system, GSM module and other signal transmitters 751411 99,95



TriGas alarm for propane/butane/KO gas

- · Warns about anesthetic gases
- Visual and audible indication of operational readiness, calibration phase and alarm

Fixed connection directly to body battery. Pressure switch. Ready for operation after ca. 1 min. With high-sensitivity sensor and ca. 80 dB loud siren. The TriGasAlarm checks the function of the sensor each time it is switched on and automatically calibrates itself to ambient air and temperature. In addition, the intelligent electronics carries out the following steps every 40 sec. performs a calibration check and adjusts it if necessary. The TriGasAlarm has temperature guidance and compensates for differences so that the detection of hazardous gases works reliably even at temperatures above 25°C. LED display: Green (flashing) = calibration phase, Green (continuous) = everything OK, Red (flashing) = 20 sec. Pre-alarm without sound, red (continuous) = alarm + continuous alarm sound (loud = ca. 80 dB)

80247 109.-Optional additional sensor (not shown) Placed 10 cm below the ceiling)

802470 49.-



MagicSafe MSG 150 gas detector

- Can be used as a standalone device
- · Automatic adjustment to the room air
- · Can be switched on if required (saves energy)
- Automatic self test

The MSG 150 gas detector detects all common narcotic gases in the room air before their narcotic effect occurs. Alarm indication via red LED or signal tone. 80202 135 -



# AMS Gas Combination Alarm Device Compact

- · Ideal for use in caravans, motorhomes or truck cabs with a small volume of space Warns about liquid gas and anesthetic gas
- · For detection of propane, butane, methane gases and anesthetic gas
- · Dangerous anesthetic gases are detected even at the lowest concentrations, well before they develop their anesthetic effect
- Low power consumption in normal operation of ca. 90 mA, 12 V

### Response thresholds:

Butane ca. 0.4 % / propane ca. 0.5 % / methane ca. 0.8 % / anesthetic gas from ca. 100 ppm.

LED yellow = start-up phase / LED green = operating display / LED red = (3 x) for alarm message, Acoustic warning signal via electric siren with a volume of 85dB (A) Dimensions: W 115 x H 90 x D 30 mm. 80210 127.90

Fig. similar to

# CAN bus radio alarm system for VW T6.1/T6, Fiat Ducato, VW Crafter/MAN TGE

- · Easy installation through vehicle-specific basic alarm kits
- No complex cabling necessary thanks to wireless sensors

### Combine optional wireless sensors as required, up to 55 sensors can be connected

The basic alarm kits are optimally matched to the respective vehicle type. Combine the basic alarm kit with up to 55 wireless alarm sensors as needed. The sensors send a permanent radio signal to the CAN bus adapter and thus ensure constant vehicle monitoring. Operate the alarm system with the remote control of your original vehicle key or via the optionally available radio remote control. Secure windows, doors and storage flaps of your motorhome or camper with the optional wireless alarm sensors.

### Vehicle-specific CAN bus basic alarm kits

### • For VW T6.1/T6, Fiat Ducato, VW Crafter/MAN TGE

• Can be combined with up to 55 wireless alarm sensors (optionally available)

**Technical data:** Power supply: 12V, frequency: 433.92 MHz, current consumption with alarm on <15mA, operating temperature -30° C - +70° C, volume 118 dB. **Scope of delivery:** CAN bus basic alarm kit, vehicle-specific cable set, siren, mounting material, operating instructions.


**Mounting:** The external siren is mounted in the engine compartment using a vehiclespecific bracket. The basic alarm kit is mounted in the dashboard, the wiring is connected to existing vehicle cables (in different places).

 For VW T6.1 / T6 from My. 2015
 47491
 199, 

 For Fiat Ducato / Citroën Jumper / Peugeot Boxer / Iveco Daily from My. 2011
 47490
 199, 

 For VW Crafter / MAN TGE from My. 2017
 47492
 199,

# Combine wireless radio sensors as required

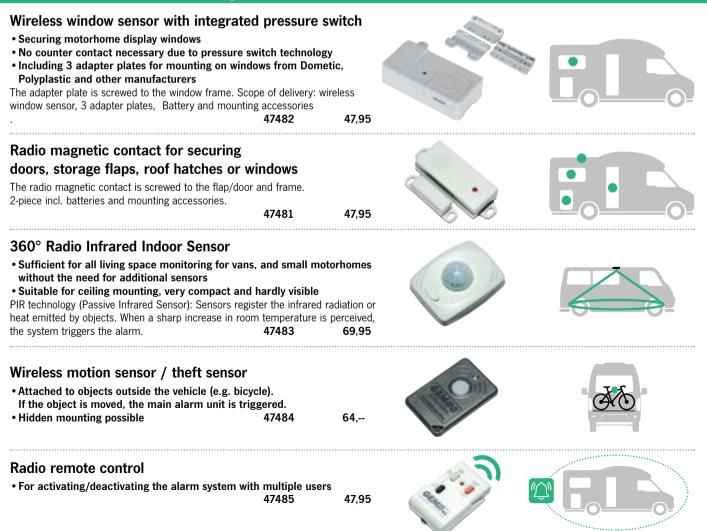

# RADIO ALARM SYSTEMS



### WiPro III + WiPro III safe.lock

### CAN bus radio alarm systems for motorhomes

- Simple, intuitive handling: vehicle locked/alarm armed
- Radio magnetic contacts without cable!
- Stay in the vehicle possible without deactivating sensors
- Panic alarm function
- Control of the alarm control panel via radio hand-held transmitter or converted vehicle radio key (optional)
- Easy add 2.0: Subsequent coupling of radio accessories via radio handheld transmitter or car doors
- Up to 100 radio modules can be coupled
- Up to 75 meters radio range
- Copy-proof due to over 4 billion codes
- Protection from replay attacks
- Jammer detection "anti-jamming
- Remote alarming and locating with Pro-finder
- Optical alarm possible by means of Alphatronics ONE SAT system

#### Technical data:

Current consumption ca. 11 mA, power supply 12/24 V, alarm tone ca. 102 dB Weight of control panel: ca. 90 g, dimensions of control panel (W x H x D): 80 x 80 x 29 mm

#### Scope of delivery:

WiPro III or WiPro III safe.lock control panel, radio hand-held transmitter 868, radio magnetic contact black 868, wiring harness, installation material, manual

 WiPro III safe.lock
 For Fiat Ducato, Citroën Jumper, Peugeot Boxer, Iveco

 Daily as of 2006
 470904
 479, 

 For Ford Transit from My. 2019 Switch lock can be activated in the vehicle
 470914
 479. 

#### WiPro III

For Ford Transit > 2006+

69.-

Black

470901 429,-

THITRONIK

For Mercedes-Benz Sprinter >2006+ Mercedes-Benz Vito > 2014+ | VW Crafter > 2006+ | MAN TGE > 2017+ 470902 479.-

For VW T5 2003 - 2015 | VW T6 > 2015+ | Renault Master > 2003+ as well as vehicles without CAN bus and other models **470903 429,–** 



### 1 NEW: NFC module

The NFC module mounted on the inside of the vehicle window serves as a virtual key for arming and disarming your alarm system using a transponder card or with the accessory NFC tag (key fob), wristband or compatible credit card. The perfect control solution for WiPro III, WiPro III safe.lock and WiPro easy alarm systems. Owners of a WiPro III safe.lock can additionally access your central locking system and unlock and lock your vehicle without a key.The NFC accessory is encoded with a security code and uses MIFARE DESFire ev2 technology for maximum security. Scope of delivery: NFC module, batteries, transponder card. **Available end Q1/2023**.

	470920	167,
NFC transponder card	470921	19,-
NFC tag	470922	19,-
NFC silicone wristband	470923	25,-

### ② Radio handheld transmitter 868 470909

(3) Radio magnetic contact 868: Self-adhesive radio magnetic contact with tamper protection for securing windows, doors, storage flaps, roof boxes, roof hatches, etc.

Black	47093	69,
White 868	470930	69,
(4) Radio cable loop 868: Secures your mobile		
goods outside the vehicle. The radio cable loop		
alarms in case of cutting or sabotage. White, length		
2.5 m	47089	91,
Weiß, Length 5.0 m	470900	97

(5) Radio gas detector 868: For connection to12/24 V. Reports narcotic gas attacks and gas leaks(propane/butane) by radio.47096125,-

(6) Auxiliary siren, 12V	80222	39,	
<b>External back up siren,</b> Warns in case of power su (o. Fig.)	-		
⑦ <b>Mounting adapter:</b> For optimal mounting of the radio magnetic contacts on door seals of the storage flaps.			
White	472269	17,	

472262

17.-

# **RADIO ALARM SYSTEMS**

Ideal for

Caravan owner

and self builders

a

Compatible with the

COMPATIBLE WITH

ELEKTRONIK

ILE MT

### WiPro easy - wireless alarm system for caravan owners and self-builders

· Easy installation with proven Thitronik safety standard

- Radio magnetic contact included (1 piece)
- Expandable by up to 8 radio components
- Operation via radio handheld transmitter
- Audible warning with 105 dB volume

THITRONIK

The 12V alarm system is easy to install and offers the proven THITRONIK® security standard. With the included wireless handheld transmitter, the alarm system can be armed/disarmed and panic alarm can be triggered. A radio magnetic contact is included in the scope of delivery.

Visual warning when windows or roof hatches are still open (vent check easy). Siren with 105 dB volume and panic alarm function.

The system can be expanded by up to 8 additional radio components, including the new NFC module (see page 400).

Scope of delivery: WiPro easy control panel, radio hand-held transmitter 868 (loud/silent), Radio magnetic contact 868 black, siren, status LED, connection cable, quick start guide, mounting material, warning sticker. 470911 299 -

### Networking module for WiPro III

· Control of the WiPro III via Bluetooth

· Control central locking via smartwatch and smartphone (only in conjunction with WiPro III safe.lock)

This module couples the smartphone with the WiPro III alarm system via app and Bluetooth in the vicinity of the motorhome and the authorized user can conveniently arm or disarm at any time. With a WiPro III safe.lock, which also accesses the existing central locking system, the vehicle can be opened and closed without a vehicle key and hand-held transmitter. The networking module can also be integrated into an already installed Pro-Finder positioning system.

### Technical data:

Operating voltage 12/24 V, dimensions (W x H x D) 52 x 56 x 25 mm 470910

# Pro-finder: Locating solution for WiPro III / WiPro III safe.lock and as "stand alone" locating system

- · Receive alarm messages via SMS or phone call
- · Locate stolen vehicle
- · Can also be used without alarm system
- · Remotely control alarm system via SMS or call
- · Geofencing (virtual fence) through WiPro
- Easy add 3.0: Subsequent pairing of Radio accessories via app
- · Low monthly costs (onlySIM card fees or prepaid card)
- Integrated GPS receiver & GSM antenna
- Voltage monitoring
- Integration of Büttner electronics

### Accessories for Pro-finder:

(1) Switch-off device For decommissioning the vehicle.

80259 35.--

face: RJ10 (input for WiPro), outputs:

Central unit dimensions (W x H x D): 103 x 96 x 30 mm

Scope of delivery: Pro-finder with cable set, moun-

472176

2 x open collector (max. 0.5 A), weight central: ca. 110 g,

ting material, manual.

(3) GSM antenna (2m cable): Provides a secure cellular connection in areas with weak reception. Is screwed to the antenna socket instead of the rod antenna. 472178 66.--

#### (4) GPS-pro (external GPS)

Used when the internal GPS receiver of the Pro-finder is covered by metal parts, for example, and therefore has no reception. Cable length: 2 m 472177 129.-

(2) 3



479.--

Pro-finder



Control via







Data flat rate throughout Europe



# GPS tracking complete set easyWire for direct

- connection to the vehicle battery
- Position acquisition via GPS and GLONASS
- Precise, worldwide real-time location of vehicles via GPS
- Easy installation directly to the vehicle battery (10-32 V)
- Includes SIM card and Europe-wide data flat rate for 12 months, after which renewal is subject to a charge via app
- No contract commitment, no hidden additional costs
- Free YUKAtrack app for all iOS and Android smartphones
- Integrated rechargeable battery (3.7V, 45 mAh) for short-term mobile use

 $\ensuremath{\mathsf{GPS}}$  tracking box including SIM card and free app.

YUKAtrack - all in one package! Suitable for car, camper, van and truck.

List of countries and available languages: Albania, Austria, Bosnia and Herze- govina, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Macedonia, Montenegro, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey, United Kingdom.

Technical data: SIM: Nano SIM, Memory: 128 MB internal flash memory, Integrated battery: 3.7V, 45 mAh, Data: EU data flat rate for 12 months.

Scope of delivery: 1x YUKAtrack GPS Tracker including SIM card with data flat for 12 months in Europe, 1x Quick Start Guide. (Delivery without smartphone) 47056 119,–

# GPS tracking complete set with on-board diagnostic interface (OBD2)

- Position acquisition via GPS and GLONASS
- Precise, worldwide real-time location of vehicles via GPS
- Easy installation via OBD2 interface of the vehicle
- Includes SIM card and Europe-wide data flat rate for 12 months, after which renewal is subject to a charge via app
- No contract commitment, no hidden additional costs
- Free YUKAtrack app for all iOS and Android smartphones
- Power supply: 10-32 V
- Integrated rechargeable battery (3.7V, 45 mAh) for short-term mobile use

GPS tracking box including SIM card and free app. YUKAtrack - all in one package! Suitable for car, camper, van and truck.

List of countries and available languages: Albania, Austria, Bosnia and Herze- govina, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Macedonia, Montenegro, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey, United Kingdom.

Specifications: SIM: Nano SIM, Memory: 128 MB internal flash memory, Built-in battery: 3.7V, 45 mAh, Data: EU data flat rate for 12 months, Dimensions: 52.6 x 29.1 x 26 mm.

Scope of delivery: 1x YUKAtrack OBS2 GPS Tracker including SIM card with data flat for 12 months in Europe, 1x Quick Start Guide. (Delivery without smartphone)

47054 119,-



# SECURITY LOCKS

### Security locks for cab doors


- · Secure radial lock including keys
- Anodized aluminum slider and lock base
- · Lock with high strength steel cylinder
- Stainless steel screws
- Chic look
- Drill resistant core for added strength












Fiat Ducato 8 from My. 09/21 For panel vans and motorhomes, mounting on the cab doors inside. Left and right keyed alike. Dimensions: L165 x W155 x D65 mm, weight: ca. 1 kg. Scope of delivery: 2x lock with mounting hardware and 3 keys. 464353 199.--



Fiat Ducato My. 2006-2021 For panel vans and motorhomes, mounting on the cab doors inside, Left and right keyed alike. Dimensions: L180 x W165 x D45 mm, weight: ca. 0.9 kg. Scope of delivery: 2x lock with mounting hardware and 3 keys. 464354 189.--

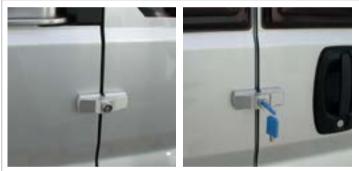

### Universal surface-mounted lock for sliding and rear doors Mounting on camping buses and vans possible.

Dimensions: L180 x W165 x D45 mm, weight: ca. 1 kg. Scope of delivery: 2x lock with mounting material and 3 keys, incl. mounting template. 464355 209.--



# Universal lock for body doors

External locking by key, locking and unlocking from the inside via rotary lever. Mounting possible on all motorhomes and caravans. For mounting the rotary lever, there must be a distance of min. 16 mm inside next to the door. Dimensions: L250 x B140 x D50 mm, weight: ca. 1 kg. Scope of delivery: 1x lock with mounting hardware and 2 keys 464350

124.-





Universal installation lock for luggage flaps Can be mounted on all motorhomes and caravans. Dimensions: L250 x B140 x D50 mm, weight: ca. 0.8 kg. Scope of delivery: 1x lock with mounting material and 2 keys, incl. mounting template. 464352 112.--





Universal surface-mounted lock for luggage flaps Can be mounted on all motorhomes and caravans. Dimensions: L250 x B140 x D50 mm, weight: ca. 0.8 kg Scope of delivery: 1x lock with mounting hardware and 2 keys. 464351 89.90

# **HEOSAFE® SECURITY LOCKS FOR CAB DOORS**

# **HEOSolution**

# HEOSafe<sup>®</sup> Security locks for cab doors

- HEOSafe®-locksprovide additional theft protection
- Easy operation, one handle to lock/unlock the door
- Easy mounting on the armrest or on the frame of the door
- Robust and lightweight due to die-cast aluminum
- Individual parts assembled with spring pressure system (prevents rattling or vibrating)
- Special security cylinder with protective cap and robust reversible key
- 3 years manufacturer warranty







 Fiat Ducato 250/290, P. Boxer, C.

 Jumper from My. 2006, 1 pair

 Mounting: integrated in the armrest
 1


 1 Twist lock
 467433
 135,- 

 For < 09/21 (12646)</td>
 467430
 135,- 

 2 With key
 467432
 159,- 

 For < 09/21 (12846)</td>
 467432
 159,- 

 For >09/21 DUCATO 8 (12856)
 467439
 159,-



Fiat Ducato 244, P. Boxer, C. Jumper My. 2002-2006, 1 pair

 Mounting: with existing screws on the door handle

 ① 12146 Rotary lock
 46741
 129, 

 ② 12156 With key
 46742
 159,



 MB Sprinter from My. 2018

 Mounting: inside of the door frame, 1 pair

 ① 13846 Rotary lock
 467420

 ② 13856 With key
 467421





MB Sprinter, VW Crafter My. 2006-2018

Mounting: inside of the doo	or frame, 1 pair	
13146 Rotary lock	467981	135,
2 13156 With key	467991	159



Fiat Ducato 230, P. Boxer, C. Jumper My. 1994-2002, 1 pair

Mounting: with existing scr	ews on the do	oor handle
1246 Twist lock	46796	99,
② 1256 With key	46797	129,



Renault Master, Opel Movano My. 2000-2010 Iveco Daily My. 2000-2014 1 pair


Mounting: On the inside of the door frame

1546 Rotary lock	46751	135,-
2 1556 With key	467511	159,-



Renault Master, Opel Movano, Nissan NV400 >2010 Iveco Daily > 2014 1 pair

Mounting: On the inside of the	door frame	
① 15146 Rotary lock		135,
② 15156 With key	457171	159,



Ford Transit, 1 pair Mounting: On the inside of the door frame

My. 2000-2006		
1446 Rotary lock	46787	135,
② 1456 With key	46788	159,
My. 2006-2013		
① 14146 Rotary lock	467871	135,
② 14156 With key	467881	159,
My. >2014		
14646 Rotary lock	467883	135,
② 14656 With key	467882	159,

# **HEOSafe**<sup>®</sup> Single locks



### Door Frame Lock for body doors

· For body doors, rear garages, flaps on motorhome or caravan

Single lock 1750 White	467402	99,–
Set of 2, keyed alike 1750-2 White	467425	198,-



# Universal additional lock

Especially for body doors, exterior flaps, rear garages of motor homes, caravans. For door thicknesses from 20 - 90 mm. Scope of delivery: lock incl. 5 spacers (3x 2 mm + 2x 8 mm thickness)

Single lock 1958 White	467532	109,
Sets, keyed alike		
Set of 2 1958-2	467422	218,-
Set of 3 1958-3	467533	322,



# Mounting accessories for additional lock

Facilitates the installation of additional locks on doors of caravans or motorhomes with interior trim. Adjustable up to 11 cm.

1201	18

467428 25.-



### **Universal locks** Van Security for panel van

• For sliding, rear and hinged doors

467401 467409	98,95 98,95
467410	98,95
467403	198,
467411	198,-
4674031	198,
	467409 467410 467403 467411

# **HEOSafe<sup>®</sup>Sets</mark>**



alike The set consists of 2 locks for cab doors inside and 1 or 3 additional locks for the body door or flaps/rear garage. Set from 12656 + 1958, for yr. 2006 until 09/21 467434 264.--Set with 12856 + 1958 for My. from 09/21 (Ducato 8) 467444 264.--Set with 12656 + 3x 1958, for yr. 2006 until 09/21 467436 473.--Set with 12856 + 3x 1958 for My. from 09/21 (Ducato 8) 467445 473.--



Set with 12856+1951 for	My. >09/21 (D	ucato 8)
	464250	328,
Set with 12656+1951+2 x	(1958	
for My. 2006 until 09/21	464412	531,
Set with 12856+1951+2x	1958	
for My. >09/21 (Ducato 8)	464413	531,

# **HEOSAFE® ADDITIONAL LOCKS**



# HEOSafe<sup>®</sup>-van interior fuse

 For sliding door Fiat Ducato 250/290 from My. 2006, Citroën Jumper/Peugeot Boxer

Secures the sliding door when you are in the vehicle. Material: Aluminum die casting

1763	464411	79,
------	--------	-----






# Van Security Package Fiat Ducato, Boxer, Jumper

### (1760) keyed alike

The set consists of 2 locks for cab doors inside and 2 outside locks for sliding door and rear doors. In white, silver or black.

White, Silver, Silver, Black,	for My. <09/21 for My. > 09/21 (Ducato 8) for My. <09/21 >My. 09/21 (Ducato 8) for My. <09/21	467407 467416 467408	337,- 337,- 337,- 337,-
,	for My. <09/21 for My. >09/21 (Ducato 8)	467408 467417	/

# DOOR LOCKS FOR BODY DOORS

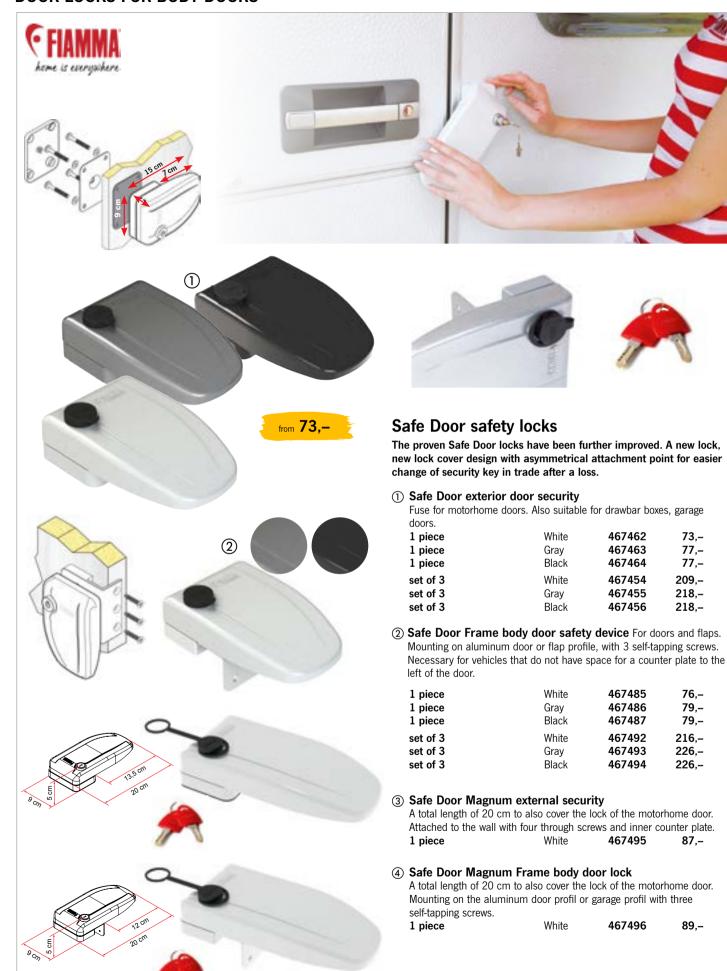

# DOOR SAFETY DEVICES / BOARDING AIDS



# Go on excursions with peace of mind - thanks to increased safety



Robust safety bar to block the front doors of the motorhome. Transport size: 123.5 x 18.5 cm. For Sprinter, Ducato, Boxer, Jumper, Master until 6/2006

46734

69,--

69.-

### ② Safe Door Guardian Safe Door Guardian

Security block, which is placed inside the door or garage of mobile homes and caravans or cab doors. Replaces the stock locks in their position using the same holes. Die cast aluminum, no plastic parts. Kit consisting of 2 pieces:

Safe Door Guardian (2 pcs. in the set)	46790	63,
For Ford Transit until My. 06/2000	46738	81,-
For Ford Transit from My. 06/2000	467381	73,-
For Fiat Ducato until My. 09/2009	467382	79,-
For Fiat Ducato from My. 09/2009	467383	80,









home is everywhere

### Door security and entry aid Security 31/46 cm high

① Entry aid and door safety device Security 31 or 46 For motorhome and caravan doors. Folded over the door, it protects against theft. Boarding aid when getting off and on. With sturdy padlock. Door hinge optionally left or right. Scope of delivery: Bracket, lock, security bolt, mounting bracket, screws and inner counter plate.

Color white.		
Security 31 Hanger 31cm high	91236	120,
Security 46 hanger 46cm high		
for 2-part entrance doors	91237	138,-

② Additional lock for kit Security Lock 31/46 Additional security lock for the entrance door. For retrofitting existing Security 31 or 46 door locks. Complete with lock and internal counter support.

912373 57,-

#### Entry aid and door security Security 46 Pro 46 cm high with additional lock. Additional anti-theft protection when the entrance door is closed. Scope of delivery: Bracket, safety lock for door, safety bolt, mounting bracket, screws and inner counter plate. 912372 180.-

Security 46 Pro with additional lock for more safety





# THULE DOOR LOCKS





### • Suitable for doors, rear garages and service hatches

Additional, robust door lock. Is permanently connected to the vehicle wall with sturdy counter plate, seal and 4 M6 screws.

	45710	74,	
Set of 3, keyed alike	45712	212,-	





Thule SecurityEntry aid and door protection for motorhomes and caravans, for right and lefthinged doors. Aluminum white, weight ca. 2 kg45720138,-



### **Door Frame Lock**

#### • Suitable for doors, rear garages and service hatches

Door interlock when the inner mounting position (counter plate) is covered by furniture/not possible. Minimum door gap (5 mm) required.

	45711	74,-
Set of 3, keyed alike	45713	212,-



### Cab Lock

To secure the vehicle doors from the inside with a key. Suitable for Fiat Ducato and Ford Transit.

(Adapter for Mercedes Sprinter and Renault Master on request). Set of 2, keyed alike 45714 142,-



# **Security Door Lock G2**

For securing body doors on	motorhomes and caravans,
Interior and exterior.	45721

123,-

# VALUABLES STORAGE / SAFES



# Protect valuable safely



#### 24,95

INNOVATIONS FOR MOBILE LIFE

49,95

47136

# **SEAT BASE SAFES FOR VANS + BOX VANS**





### Seat base safe for VW T6.1/6/5/4

Fits exactly under the passenger seat console of the VW T6.1/6/5/4. Two installation options: 1. Door opening from the footwell of the front seats. 2. Operation from the passenger compartment. Fastening via the existing screw units of the seat consoles.

External dimensions W 25 x H 13 x D33 cm. Door clearance dimension 22.4 x 10.4 cm. Weight. ca. 9.0 kg **471344 202,–** 



### Seat base safe for VW Crafter

For installation in the seat console on the driver or passenger side. Mounting with the original screw connection of the console.

Dimensions product: W 32 x H 12.5 x D 36 cm Weight: ca. 9.3 kg

For rear door: Access to the safe via the rear of the console. 471331 251.-

For door in front: Access to the safe via the front of the console. 471332 251,-



### Seat base safe for lveco Daily

For installation in the seat console on the driver or passenger side. Mounting with the original screw connection of the console. Dimensions product: W 22 x H 14 x D 40 cm Weight: ca. 7.8 kg **471330 229,–** 



# Seat base safe for MB Sprinter from My. 2019

471333

Mounting is done by means of robust screws in the standard opening and the holes in the seat console. Modifications or additional holes on the seat bracket are not necessary. For all vehicles with the opening size 9.5x20 cm in the console. Outer dimension: WxDxH 200x95x300 mm. Door clearance dimension: WxH 200x95 mm, weight: ca. 3.0 kg

229,--



# Seat base safes for Fiat Ducato

Fastening via screw connections of the seat bracket. Loosen the front screw connections of the console, place the socket safe underneath, tighten the screws, and you're done!

 For type 244/X250 from My. 2001 till 2006 Outer dimensions
 199,90

 W 28 x H 18 x D26 cm, weight. ca. 9,0 kg.
 471342
 199,90

 For type X250 + 290 from My. 2006.Outer dimensions
 W 28 x H 18 x D35 cm,Weight. ca. 11 kg.
 471343
 238, 

 Laptop version for type X250 + X290 from 6/2006, for 17" Laptop
 Driver or passenger side.Outer dimensions (WxHxD) 28 x 18 x 45 cm, weight ca. 14.0 kg.
 471347
 336,



Mobile safe size 3 A - top doorOuter dimensions W 30 x H 16 x D 40 cm, doorclearance 36 x 26 cm. 4 holes in the bottom forfixed mounting. Weight ca. 12 kg471441266,-



Standard Safe G3 - Top doorOuter dimensions W 25 x H13 x D 22 cm, doorclearance dimension 22.4 x 19.4 cm. 4 holesin the bottom for fixed mounting. Weight ca. 6.5kg.471421166,-



# suitable for 17 inch laptop

Door on top with sturdy handle. Supplied with 2 base plates, lock, handle and bottom padding. When dismantled, the base plates remain on the floor and the loading space can be fully utilized. External dimensions: W 50 x H 18 x D 36 cm. Weight ca. 19 kg. **47142 319**,–





# Mobile safe ADRIA

Suitable for almost all common Adria vehicles with floor storage compartment. Door on top with spring handle. Delivery includes mounting hardware. External dimensions: W 40 x H 14 x D 38 cm. Weight ca. 9.0 kg

471410 282,--



# Mobile safe for Globecar/ Pössl 2010 Door oben, with spring handle

Outer dimensions W 37 x H 14 x D 49 cm, door clearance 33 x 45 cm. 4 holes in the bottom for fixed mounting. Weight ca. 14 kg 471442 286,–

# **INSERT SAFES / DOOR SAFES**



# Insert safe for VW Califonia Coast & Ocean

Fits Coast, Coast 30 Years reflex silver metallic, Coast 30 Years indium grey metallic, Coast Edition, Ocean, Ocean Edition and Ocean grey/red/blue models. The installation is located in the cabinet at the rear left. Fastening via existing holes in the cabinet. Material: 5 mm SM steel impact and scratch resistant powder coating. Dimensions (WxDxH): 320 x 400 x 60 mm Weight: ca. 5.8 kg **471400 181,–** 



# Door safe for Fiat Ducato

Can be mounted on the driver or passenger door of the original Fiat cab doors from year of manufacture 06 (type x 250 and x 290). The original attachment points of the map pocket located there are used for this purpose. Provides space for a 15-inch notebook. Secured with 3-bolt locks.

# $\begin{array}{c|c} \mbox{My. 2006 - 08/2019} \\ \mbox{Dimensions H 330 x W 550 x D 140 mm,} \\ \mbox{weight ca. 7.0 kg.} & \mbox{471346} & \mbox{322,50} \\ \mbox{My. 09/2019 - 09/2021} \\ \mbox{Dimensions H 525 x W135 x D 325 mm,} \\ \mbox{weight ca. 8.0 kg.} & \mbox{471348} & \mbox{322,50} \\ \mbox{From My. 09/2021 (only for passenger door)} \\ \mbox{Dimensions H 265 x W100 x D 115 mm,} \\ \mbox{weight ca. 4.2 kg.} & \mbox{471349} & \mbox{249,-} \\ \end{array}$



# Door safe for Ford Transit from My. 06/2019 (passenger side)

Specially developed for the passenger door of the Ford Transit from year of manufacture 06/2019. The safe is mounted in the door compartment with a mounting plate that can be locked and is not visible from the outside. The lid is protected from prying because there are no attachment points. The safe is equipped with a 3-bolt lock with 7 tumblers.

External dimensions: WxHxD 275x70x165 mm, weight: ca. 3.5kg. 471350 249,-

# Sting protection plate for Eurochassis door handles such as Fiat Ducato, Citroën Jumper, Peugeot Boxer from My. 06


The stab protection plate is mounted between the door handle and the vehicle body. Suitable for driver, passenger door and sliding and rear door. It prevents the lock mechanism under the door handle from being pried open (e.g. with a screwdriver). Made of sturdy stainless steel, accurately mimicking the contour of the handle. Fastening via the mounting holes of the recessed grip, no separate holes in the door necessary. **47010 36,90** 

# MARTEN PROTECTION

Marten STOP&GO secures your car, house and yard from pesky martens Over 30 years of defense experience with innovative solutions

\* Use biocides safely. Always read the label and product information before use.

### Scent Mark Remover **Special Cleaning Foam -For Pretreatment**



- Simplest handling
- Harmless for electronics, plastic, rubber and paint



Strongly recommended before any marten repellent measure!

Removes the scent mark of the marten. This means that a risky engine wash can be avoided. When the engine is cold, spray the entire engine compartment and the inside of the hood and fenders with the entire contents and allow to react briefly. Simply rinse with water.

903945

Spray can, 300 ml

10.20

۲

### Anti-marten spray Intensive active ingredient - fragrance concentrate\*

### · Long-term effect, lasts up to 2 years

- · Monthly scale for marking the next
- re-spraying date · Clean engine compartment thanks to fragrance reservoir

Marten repellent for spraying. Concentrate

with long-term effect, smells "dangerous enemy" for the marten. Spot, regular application to the enclosed self-adhesive "scent stores" is sufficient.

Spray can, 200 ml	9039452	17.95
Spray can, 200 mi	9039452	17,95

# 2-speaker ultrasound machine

- 2 waterproof piezo speakers
- Ultrasound with frequency modulation
- Simplest installation (ready wired)
- On-board power supply, maintenance-free
- · Function indicator light, flashing or steady LED
- CAN data bus suitable, E1 marking of the KBA

With 12 V on-board power supply. Frequency-modulated ultrasonic sounds that signal "maximum danger" to the marten through animal cries of fear and warning. Avoidance of sound shadows due to two loudspeakers. Ideal for narrow and compactly installed engine compartments. Note: Ultrasound does not penetrate matter.

Technical data: Radius of radiation: 360°, Angle of radiation: 2 x 160°, Sound pressure: ca. 105 dB 9039453 107.50



### STOP&GO Accessories:

Mounting bracket:

- For all STOP&GO marten repellent devices
- Simplified installation of all STOP&GO devices Mounting of the marten repellent device in the Engine compartment with only one screw
- Individual alignment of the ultrasound Mounting material included
  - 9039459 9,95

High temperature protection hose Inner diameter 12,50 mm

Packed in shipping tube of 4 x 0.50

9039457


Universal glass fabric aluflex hose for cables on catalytic converter, lambda probe and soot particle filter. Extremely heat-resistant protective hose, effectively shields heat from up to 800 °C hot radiation sources, without internal heat build-up.

32,95

# Fragrance disc - Intensive active ingredient - fragrance concentrate\*

- Effective for at least 6 months
- Tab for expiration date
- · Can be stored unopened for ca. 3 years
- Without mounting

Scent disc with long-term effect, smells "dangerous enemy" for the marten. The simple



15.95

# 4B battery ultrasonic device

- Operation with batteries
- Term up to 24 months
- · 2 waterproof piezo speakers
- Super slim design
- · Frequency modulation against habituation
- Function control lamp, flashing LED
- Waterproof according to IP65, E1 marking of the KBA

Highly effective ultrasonic device with battery operation. Frequencymodulated ultrasonic sounds that signal "maximum danger" to the marten through animal cries of fear and warning. No habituation effect.

Independent of on-board power supply due to operation with two 3-volt button cells (CR2477), long runtime of ca. 24 months per battery set. Ideal for long-term parkers such as classic cars, motor homes, exhibition vehicles or for the carport. Technical data:

Radius of radiation: 360°, Angle of radiation: > 170°, Sound pressure: ca. 110 dB 9039454 75.95

# High voltage unit with ultrasound-With six PLUS-MINUS CLIP stainless steel contact plates

- Sensor technology
- 12 Volt connection or battery operation
- 2 waterproof piezo speakers (IP65)
- · Frequency modulation against habituation
- Function control lamp, flashing LED
- · Stainless steel contact plates in super flat slimline design
- E1 marking of the KBA

The clip fastening option of the double-pole stainless steel contact plates facilitates installation and offers even more flexibility, especially for increasingly compact engine compartments. The connection to terminal 15 is omitted due to sensor technology. Thanks to a contact slide attached directly to the unit, the installation of a hood contact switch is also unnecessary.

Technical data: Radius of radiation: 360°, Angle of radiation: > 170°, Sound pressure: ca. 110 dB

7 PLUS-MINUS CLIP, with 12 V connection	9039455	219,
8 PLUS-MINUS CLIP, with battery operation	9039456	-













Danger H222, H229

# SAFETY ON THE ROAD

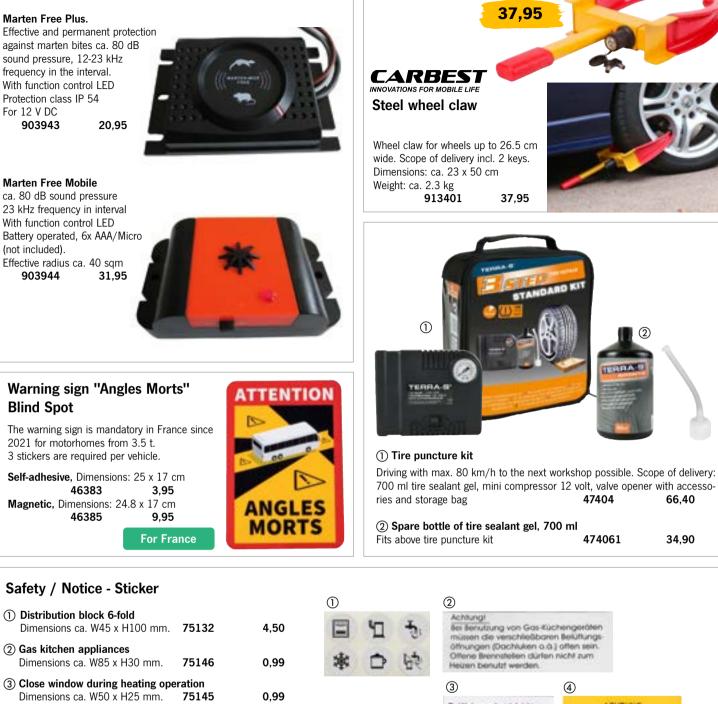



Protection against martens by ultrasonic sounds

For more signs and warning stickers please Scan QR code.





SECURITY 413

# SAFETY ON THE ROAD








OR code scan and Product video view





- · Easily shatters car windows
- Integrated belt knife

LIFE-IAMMER®

- Non-slip handle
- Incl. Quick Click clamp mount for the car door

Simply press the emergency hammer against your vehicle's windshield and the ultra-hard ceramic hammer head will automatically shatter the glass. Integrated belt knife. Easy and safe to use by adults and children thanks to non-slip handle. TÜV certified according to new German standards. The Quick Click holder allows you to attach the emergency hammer to the inside of the 47540 17,99 vehicle door.



(1) High visibility vest orange for Italy Vest according to EU DIN standard EN 471. Universal size. 471281 4,40



(2) High visibility vest yellow for Spain and Portugal Color also approved in Italy. Otherwise like 471281. 471282 4.40





### **Reserved sign**

For motorhomes and caravans, so that your campsite is not occupied by others. Dimensions: 61.5 x 30 cm 47085 24,90



# Car first aid bag

For motor vehicles. Content according to DIN and legal requirement of StVZO § 35h. Includes 2 disposable medical masks. 47127

13,20

3,40

3.40

3,40

3.40



4-piece, 1 x XXL, 1 x XL (EN ISO 20471: 2013), 2 x Universal (EN 1150: 1999) incl. practical protective bag. 471285 11,95

# FIRE EXTINGUISHERS / WARNING SIGNS

